


BFS-1-30 / BFS-2-30

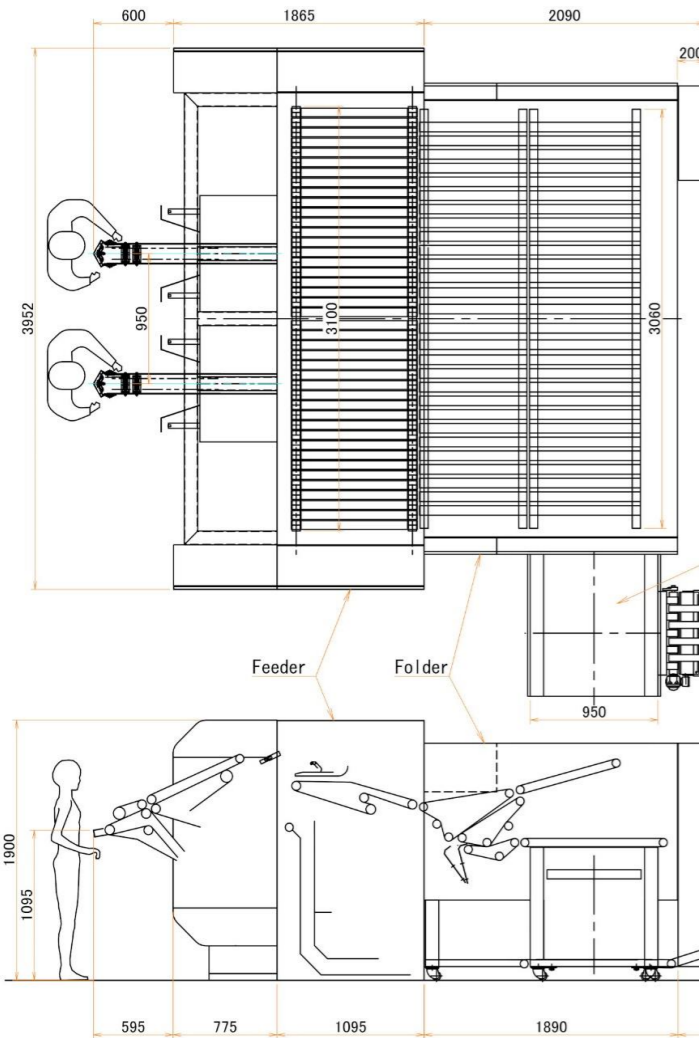


- Product Name : Blanket Finishing System
- Model : BFS-1-30 / BFS2-30
- Air Pressure / Air Consumption : 0.6Mpa 900L(L/min)
- Power Supply : 200VAC 3φ
- Electric Capacity : 10.5Kw
- Maximum blanket Size : W3000mm x L2400mm

BFS-1-30

- 1 Feeding Station
- 1 Lane Operation
- 2L x 3C Folding and Stacking
- Max 800 Pcs/h

BFS-2-30

- 2 Feeding Station
- 1 Lane Operation
- 2L x 3C Folding and Stacking
- Max 1100 Pcs/h

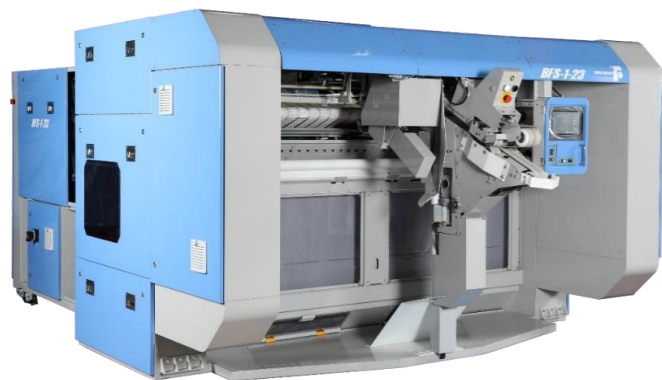

※For better performances, specifications and dimensions are subject to change without notice.

TOTO FOLDER MANUFACTURING CO.,LTD.

2-8-75, Yoshino-dai, Kawagoe-shi, Saitama 350-0833 Japan
 Phone: +81-49-225-6125 Fax: +81-49-225-6127
 ◇http://www.totofolder.jp/ ◇tf-main@totofolder.jp

Sales Agent



TOTOFOLDER MANUFACTURING CO.,LTD.

Cornerless feeding

Cornerless feeding mechanism that simply place the center of the item on the conveyor. The machine will automatically find the both ends of the item and spread it.




Prevention from entanglement


In case that hands are entangled into a conveyor, the conveyor will automatically rise and the machine will stop immediately.



Feed items to conveyor directly

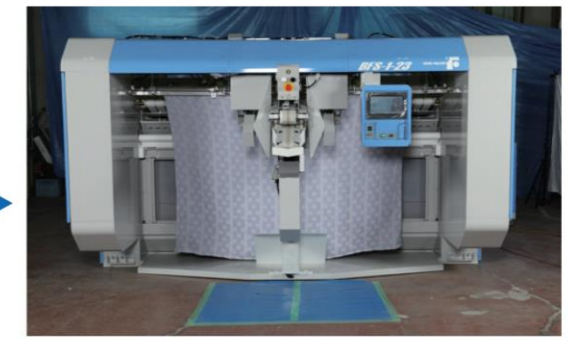

Spread items and transfer

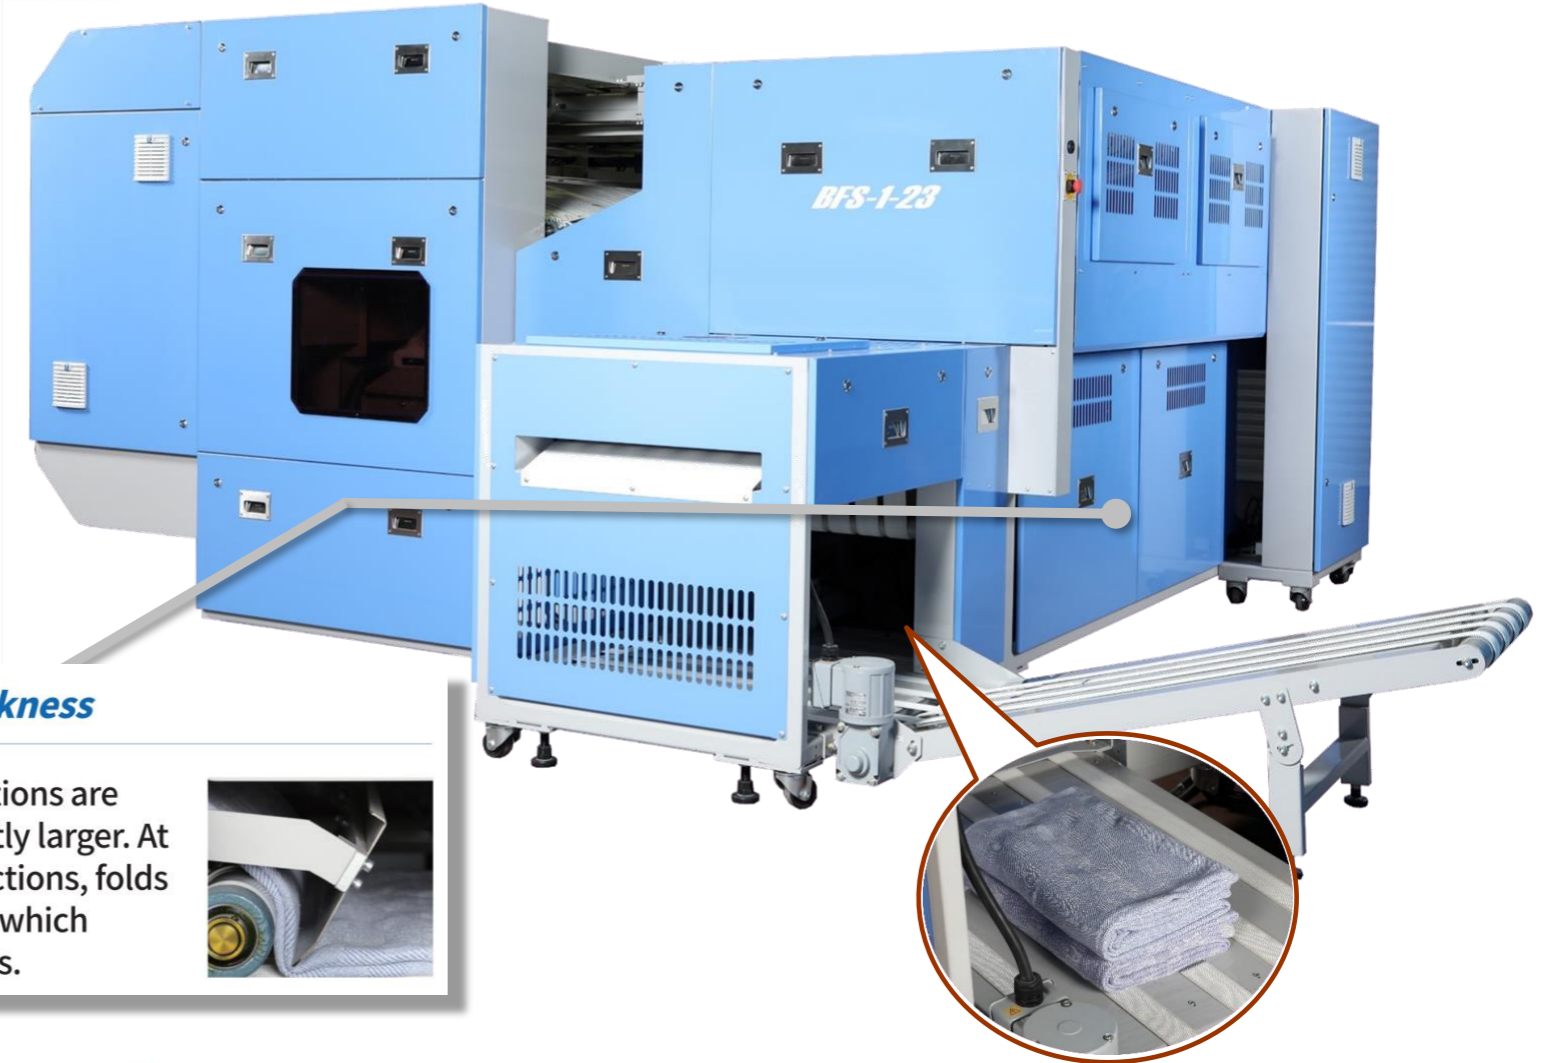

Buffer function

2 pieces can be buffered at one feeding station. Max. 4 pieces can be stored.




Dealing with thickness

Gaps at folding positions are designed to be slightly larger. At all the Cross Fold sections, folds are made by knives, which gives perfect foldings.



Just one machine from feeding to folding

Integrated feeder and folder, a full series of works are done by one machine. Feeding section is user-friendly designed, anybody can operate easily.

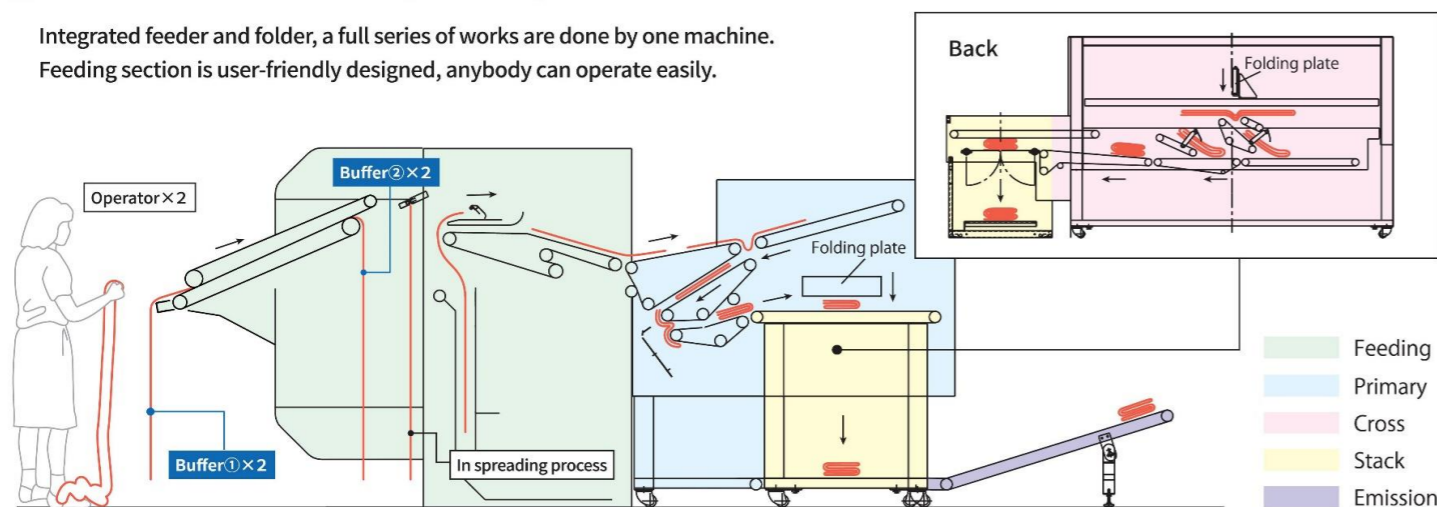

Typical folds *Depending upon sizes of items, the numbers of folding way.

(Target items: All dry works such as blankets. Length 1,000 – 2,000mm x Width 1,600 – 3,000mm)

Example	Primary		Cross		
	1st Primary	2st Primary	1st Cross	2st Cross	3st Cross